



FloPro™ VS

8 SPEEDS FOR MAXIMUM ENERGY EFFICIENCY

1 GUARANTEED ENERGY SAVINGS AND SILENCE

Thanks to its variable speed, the FloPro™ VS pump has two major advantages: **reduced electricity consumption by up to 90%** and an **ultra-silent operating mode**, up to 24 dB(A) quieter*, which is **similar to the sound level in a library**.

2 SMART OPERATION

Thanks to its **8 programmable speeds**, ranging from 600 to 3,450 rpm, different speeds can be set for each pool function (normal filtration, heating, cleaning, etc.) for **optimised management of your electricity consumption**.

3 REMOTE CONTROL

It has a **deportable user interface** so you can operate your FloPro™ VS from wherever you like.



LOW NOISE
LEVEL



ENERGY
SAVING



REMOTE
INTERFACE


BENEFITS OF THE FloPro™ PLATFORM



EASY
RETROFIT

Easy to install, even as a replacement

Thanks to the "Easy Retrofit" system, pumps can be installed without changing the piping. So, they are compatible with most existing installations.



LARGE
CAPACITY


Easy maintenance

A pre-filter basket that is up to 117% larger means more debris can be captured before the filter needs to be cleaned.

* Compared to a standard filtration pump emitting at least 66 dB(A). Values expressed in A-weighted acoustic power level according to ISO standard 3741.

BENEFITS

- 63/50 mm union tailpieces provided
- 2 provided pump bases for easy installation
- Remote user interface kit provided
- 100% compatible with Zodiac® AquaLink® TRi automation
- Compatible with salt water

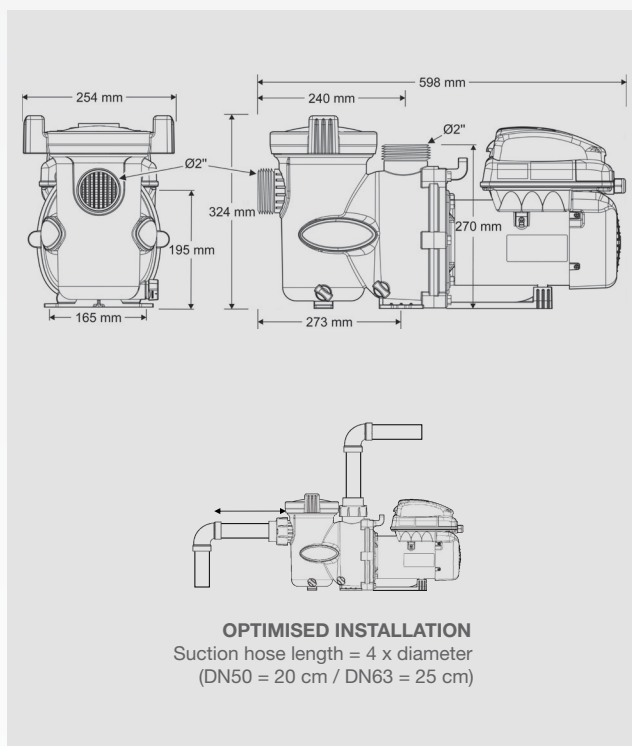

OPTIMISED INSTALLATION

Suction hose length = 4 x diameter
(DN50 = 20 cm / DN63 = 25 cm)


TECHNICAL INFORMATION

User interface	2-line, backlit LCD screen, remote interface (remote kit supplied)
Speeds	8 programmable speeds (timer) (600 - 3,450 rpm, adjustable in intervals of 10 rpm)
Usage	Fresh water and salt water up to 6 g/L (6,000 ppm)
Power output (P2)	1.65 HP / 1.23 kW
Flow rate at 10 m head	24.1 m ³ /h (at 3450 rpm)
Maximum flow rate	30.7 m ³ /h
Maximum Manometric head	21.5 m
Pre-filter basket volume	2.6 L
Motor type	Permanent magnet synchronous motor (ECM* technology), TEFC**, class F insulation
50 Hz power supply	220-240 VAC

*: ECM = Electronically Commutated Motor (= electronically controlled permanent magnet 'brushless' motor)

** : Totally-Enclosed Fan-Cooled


PERFORMANCE GRAPHS

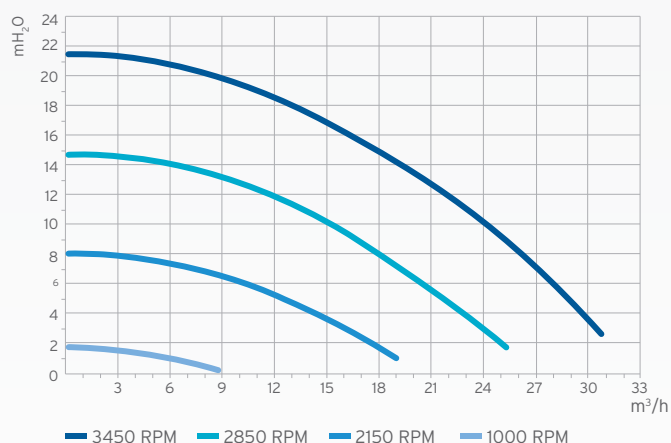

STANDARD FEATURES



Remote interface kit



Thin pump base



Thick pump base



63/50 mm union tailpieces

FOR WHICH TYPE OF POOLS?

1 ALL TYPES OF SWIMMING POOL



2 POOLS UP TO 100 M³

OPTIMUM EFFICIENCY IN POOLS FROM 30 TO 80 M³



3 YEAR
WARRANTY